

## Product Data

# Fast Cure, Non-corrosive Silicone Adhesive Sealant SnapSil\* TN8000

TN8000 is a one-component, fast cure, non-corrosive silicone adhesive sealant that cures on exposure to atmospheric moisture to form an elastic silicone rubber.

TN8000 has a thixotropic paste consistency and excellent corrosion-free adhesion to metals, including copper, plastics, glass without the use of primers.

### Key Features

- ◆ Fast room temperature cure, and neutral alkoxy cure type
- ◆ Primerless adhesion to many substrates
- ◆ Excellent adhesion after extended aging, and excellent dielectric properties
- ◆ Flame retardant : UL94HB recognized (File No.E56745)

### Applications

- ◆ Insulating adhesive sealing and fixing for electrical and electronic parts
- ◆ Waterproof sealant for electrical, electronic and communication equipment
- ◆ General adhesive for metals, glass, plastics, etc.

### TYPICAL PROPERTY DATA

(JIS K 6249)

UNCURED PROPERTIES (23°C,50%RH)		TN8000-W, -B, -G
Appearance		Non-Flowable, White, Black, Gray
Tack free time	min	20
CURED PROPERTIES (7days @ 23°C,50%RH)		
Appearance		Elastic rubber, White, Black, Gray
Density	g/cm <sup>3</sup>	1.41
Hardness (Type A)		33
Tensile strength	MPa	2.2
Elongation	%	620
Adhesive strength <sup>*1</sup>	MPa	1.8
Thermal conductivity <sup>*2</sup>	W/(m·K)	0.38
Linear expansion <sup>*3</sup>	1/K	2×10 <sup>-4</sup>
Volume resistivity	MΩ·m	7×10 <sup>6</sup>
Dielectric strength	kV/mm	21
Dielectric constant (60Hz)		3.9
Dissipation factor (60Hz)		0.04

<sup>\*1</sup> Aluminum Lap shear. <sup>\*2, \*3</sup> In-house test method.

*Typical property data values should not be used as specifications.*


## ADHESION PERFORMANCE

TN8000 has excellent bonding properties and adheres to many materials without primers.

	TN8000-W, -B, -G
Aluminum	○
Stainless steel	○
Copper	○
Mild steel	○
Zinc plate	○
Nickel plate	○
Acrylic resin	○
Polyester	○
Epoxy resin	○
Polycarbonate	○
ABS	○
PBT (Polybutylene terephtharate)	○
PPS (Polyphenylene sulfide)	○
PET (Polyethylene terephtharate)	○
PPE (Polyphenylene ether)	○
Modified PPO	○
Phenolic resin	○
Nylon-6	○
Nylon-66	○
PVC (Polyvinyl chloride)	○
Glass	○
PE (Polyethylene)	×
PP (Polypropylene)	×

○ : Adhere completely (Cohesive failure),    × : Does not adhere

## CURE PERFORMANCES

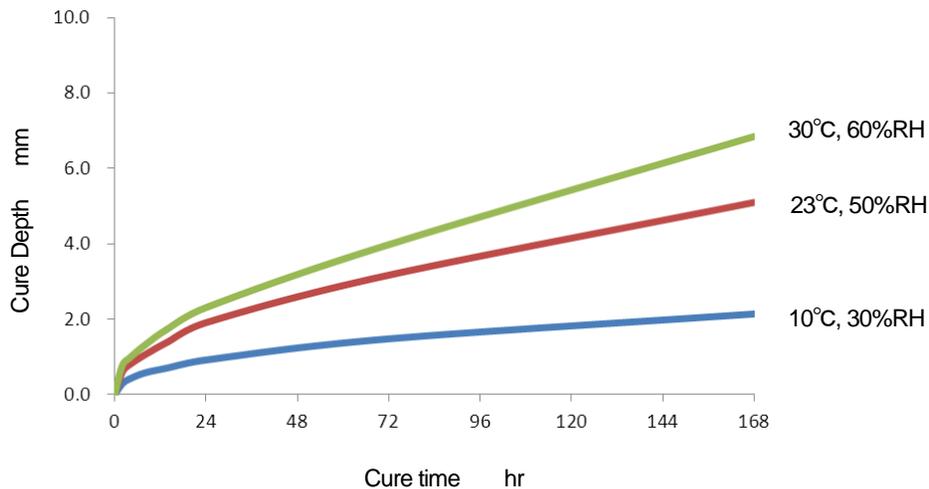

## GENERAL INSTRUCTIONS FOR USE

- ◆ Substrate surface should be thoroughly cleaned with a suitable solvent such as alcohol, xylene methyl ethyl ketone (MEK) etc.
- ◆ Wear eye protection and protective gloves as required while handling.
- ◆ Adequate ventilation must be maintained in the work place at all times.
- ◆ General adhesive for metals, glass, plastics, etc.

## STORAGE

- ◆ Store in a cool, dry place out of direct sunlight.
- ◆ Keep out of the reach of children.

## PACKAGING

- ◆ 333ml cartridge in case of 10
- ◆ 25kg pail

## DISCLAIMER

THE MATERIALS, PRODUCTS AND SERVICES OF MOMENTIVE PERFORMANCE MATERIALS HOLDINGS INC., MOMENTIVE PERFORMANCE MATERIALS JAPAN LLC., THEIR SUBSIDIARIES AND AFFILIATES (THE "SUPPLIERS"), ARE SOLD SUBJECT TO SUPPLIERS' STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE SALES AGREEMENT, PRINTED ON THE BACK OF ORDER ACKNOWLEDGMENTS AND INVOICES, OR AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SUPPLIERS MAKE NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING SUPPLIERS' PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. NOTHING IN THIS OR ANY OTHER DOCUMENT SHALL ALTER VALLY, SUPERSEDE OR OPERATE AS A WAIVER OF ANY OF SUPPLIER'S STANDARD CONDITIONS OR SALE.

Each user bears full responsibility for making its own determination as to the suitability of Suppliers' materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished parts incorporating Suppliers' products, materials, or services will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of Suppliers' Standard Conditions of Sale or this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Suppliers. No statement contained herein concerning a possible or suggested use of any material, product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Suppliers or any of its subsidiaries or affiliates covering such use or design, or as a recommendation for the use of such material, product, service or design in the infringement of any patent or other intellectual property right.



## Momentive Performance Materials Japan LLC

<http://www.momentive.com>

Technical Answer Center (Japan) Phone: +81-276-20-6182 Fax: +81-276-31-6259

Tokyo Head Office Phone: +81-3-5544-3111 Fax: +81-3-5544-3122

Issued June 2014 / REV2\_June 2015/ TN8000\_E